

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as First Class Mail in an envelope addressed to:

"Assistant Commissioner for Patents
Washington, D.C. 20231"

on February 6, 2004

GERARD J. MCGOWAN, JR.

Reg. No. 29,412

Attorney for Applicant(s)

02/06/04

Date of

Signature

PATENT

#03-0309-UNI

Case #F3320(C)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Uijen
Serial No.: 10/688,580
Filed: October 17, 2003
For: REFRIGERATION APPARATUS

Edgewater, New Jersey 07020
February 6, 2004

SUBMISSION OF PRIORITY DOCUMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Pursuant to rule 55(b) of the Rules of Practice in Patent Cases, Applicant(s) is/are submitting herewith a certified copy of the European Application No. 02257199.6 filed October 17, 2002, upon which the claim for priority under 35 U.S.C. § 119 was made in the United States.

It is respectfully requested that the priority document be made part of the file history.

Respectfully submitted,

Gerard J. McGowan, Jr.

Reg. No. 29,412

Attorney for Applicant(s)

GJM/mt
(201) 840-2297



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02257199.6

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02257199.6
Demande no:

Anmeldetag:
Date of filing: 17.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

UNILEVER PLC
Unilever House,
Blackfriars
London EC4P 4BQ
GRANDE BRETAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Refrigeration apparatus

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

A47F3/04

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

REFRIGERATION APPARATUSField of the invention

5 The present invention refers to a refrigeration apparatus of the type comprising at least a first compartment and at least a second compartment that are cooled down at different temperatures, as well as a temperature balancing device adapted to ensure a correct operation of the apparatus.

10

Background of the invention

Refrigerating apparatuses, used as display cabinets, in stores and shops, are well known wherein a single compartment is
15 maintained at a certain temperature by a refrigerating circuit comprising a single compressor and at least one evaporator. These apparatuses are equipped with a door which can be either vertical, in the case of a 'cupboard like' cabinets, or horizontal, in the case of a 'flat-top' cabinet such as described
20 in US3,729,243. In any case the door is transparent to allow for potential customers to see what is inside the display cabinet.

More and more products are now displayed in such cabinets while they may have different storage temperature.

25

There is therefore a need for refrigerating apparatus of the display cabinet type which can be used for simultaneously storing products at different temperatures.

30 Refrigeration apparatuses are well-known in the art which comprise a refrigerating circuit provided with a single compressor and two evaporators arranged in series and associated to a refrigerated compartment and a freezer compartment,

respectively. Automatic control means enable the refrigerated compartment temperature to be set and the compressor to be caused to operate cyclically in order to keep respective pre-determined temperature ranges in the two compartments.

5

A temperature balancing device can be adapted in the cold storage compartment to artificially heat up the cold storage compartment when the ambient temperature is excessively low, in such a manner as to increase the rate of the operation cycles of the
10 compressor, thereby preventing the temperature in the freezer compartment from increasing.

Such devices require the use of two evaporators, one in each compartment.

15

There is thus a need for refrigerating apparatuses of the display cabinet type presenting two compartments at two different temperatures, while requiring only evaporator means in one
20 compartment.

20

It therefore is a purpose of the present invention to minimise the drawbacks of such prior-art solutions.

Summary description of the invention

25

It is a first object of the invention to provide a refrigeration apparatus, situated in an environment at temperature T_e , comprising;

30

- . a first compartment at a temperature T_1 , the first compartment being accessible through at least an opening , and
- . a second compartment at a temperature T_2 , T_1 being colder than T_2 , T_1 and T_2 being colder than T_e ,

- . a refrigeration circuit in the first compartment adapted to keep temperature T1 within a range R1 through a sequence of energisation and de-energisation phases triggered by comparing actual temperature T1 with a first reference temperature T1r,
- 5 . heating means in the second compartment adapted to keep temperature T2 within a range R2.

This apparatus allows for storing at two different temperatures, both lower than the temperature Te of the room in which the
10 apparatus is located.

The opening in the first compartment can either be on the top of the first compartment or on a side face of it. If it is on the top, it does not need a door or a lid (open top freezer), if it
15 is on a side, it is preferable to have the opening closed by a door. The second compartment can be accessed either through an opening, or through a door.

Preferably, the refrigeration circuit comprises an evaporator, the evaporator being connected to a compressor located outside
20 the first compartment. More preferably the second compartment does not contain an evaporator.

Preferably also, the second compartment door is transparent.
25

In a preferred embodiment of the invention, the heating means are triggered by comparing the actual temperature T2 with a second reference temperature T2r, thus keeping temperature T2 within a range R2.

30 In a particularly preferred embodiment of the invention, the reference temperatures T1r and T2r are set by means of control means. T1r is comprised between -16 to -23°C and wherein T2r is

comprised between -15°C and $+5^{\circ}\text{C}$, preferably below 0°C even more preferably below -5°C .

It is a second object of the present invention to provide a
5 process for manufacturing a refrigeration apparatus according to the invention wherein a freezer;

- . comprising a storing volume adapted to receive products to be stored at a temperature below 0°C (preferably between -16°C and -23°C), an evaporator within said storing volume and a
10 compressor located outside said storing volume,
- . is fitted with a storing box, adapted to receive products to be stored at a temperature above the temperature in the storing volume (preferably between -15°C and $+5^{\circ}\text{C}$, more
15 preferably below 0°C , even more preferably below -5°C), located within the storing volume, said box being fitted with heating means.

In this case, the second compartment is actually located inside
20 the first compartment.

The evaporator in the first compartment can be isolated from the rest of the compartment by a wall. In this case means are provided for forcing air located in the first compartment to pass
25 in the volume limited by the wall wherein the evaporator is located, thus cooling this air.

It is therefore possible, starting from a standard freezer such as those used as display cabinets to create two compartments
30 which can be maintained at two different temperatures, thus allowing storing products at two different temperatures without having to dispose of the original freezer.

Detailed description of the invention

The present invention will be further described by reference to the drawings wherein the sole figure represents a schematic view
5 of a refrigeration apparatus according to the invention.

As disclosed in Figure 1, the refrigeration apparatus according to the present invention is of the type comprising a freezer compartment 1 and a cold storage compartment 2. In a known
10 manner, the two compartments 1 and 2 are thermally insulated. Preferably, their walls comprise insulating material having a thermal conductivity in the range of 0.5 to 50 milliWatt(meter Kelvin)⁻¹. The insulating material can be, for example, polystyrene, fibreglass, or vacuum.

15 The freezer compartment 1 is fitted with an evaporator 5 connected to a compressor 6. Through a sequence of switch on and switch off periods, the freezer compartment 1 is kept at a temperature T1. The switch ons and switch offs are triggered by
20 comparing the actual temperature T1 in the freezer compartment with a reference temperature T1r which can be set by means of control means not represented.

The freezer compartment is accessed through an opening 10 which
25 can either be closed by a door or a lid, or left open (open top freezer).

The cold storage compartment 2 is fitted with heating means 7, a fan 8 and a door or a lid 9. The cold storage compartment is
30 maintained at a temperature T2, higher than T1, by the heating means 7 which are triggered by comparing the actual temperature T2 with a reference temperature T2r which can be set by means of control means not represented.

As can be seen in Figure 1, an existing freezer, for example of the open top type, can be fitted with a box, said box being itself fitted with heating means 7, a fan 8 and a door or lid 9.

5 Thus an existing freezer can easily be fitted with additional means which allow for the creation of two compartments operating at two different temperatures without the need for an additional refrigeration circuit.

10 In operation, temperature T1 in the first compartment is maintained at a set temperature by the evaporator 5 and the compressor 6. Through heat exchange with the second compartment, temperature T2 in the second compartment is brought down. When this temperature reaches a reference temperature, heating means 7
15 and fan 8 are activated.

Claim

1. Refrigeration apparatus, situated in an environment at temperature T_e , comprising;
5
 . a first compartment at a temperature T_1 , the first compartment being accessible through at least an opening , and
 . a second compartment at a temperature T_2 , T_1 being colder than T_2 , T_1 and T_2 being colder than T_e ,
10
 . a refrigeration circuit in the first compartment adapted to keep temperature T_1 within a range R_1 through a sequence of energisation and de-energisation phases triggered by comparing temperature T_1 with range a first reference temperature T_{1r} ,
15
 . heating means in the second compartment adapted to keep temperature T_2 within a range R_2 .
2. Refrigeration apparatus according to claim 1, wherein the
20
 refrigeration circuit comprises an evaporator, the evaporator being connected to a compressor located outside the first compartment.
3. Refrigeration apparatus according to claim 2 wherein the
25
 second compartment does not contain an evaporator.
4. Refrigeration apparatus according to claim 1 wherein the
 heating means are triggered by comparing the actual temperature T_2 with a second reference temperature T_{2r} .
30
5. Refrigeration apparatus according to claim 4 wherein the reference temperatures T_{1r} and T_{2r} are set by means of control means.

6. Refrigeration apparatus according to claim 5 wherein T1r is comprised between -16 to -23°C and wherein T2r is comprised between -15°C and +5°C.
- 5 7. Process for providing a refrigeration apparatus according to any preceding claim wherein a freezer;
- 10 . comprising a storing volume adapted to receive products to be stored at a temperature below 0°C, an evaporator within said storing volume and a compressor located outside said storing volume,
 - 15 . is fitted with a storing box, adapted to receive products to be stored at a temperature above the temperature in the storing volume, located within the storing volume, said box being fitted with heating means.

Abstract

A refrigeration apparatus with two compartments operating at two different temperatures wherein a freezer comprising a storing
5 volume adapted to receive products to be stored at a temperature below 0°C, an evaporator within said storing volume and a compressor located outside said storing volume, is fitted with a storing box, adapted to receive products to be stored at a
10 temperature above the temperature in the storing volume, located within the storing volume, said box being fitted with heating means.

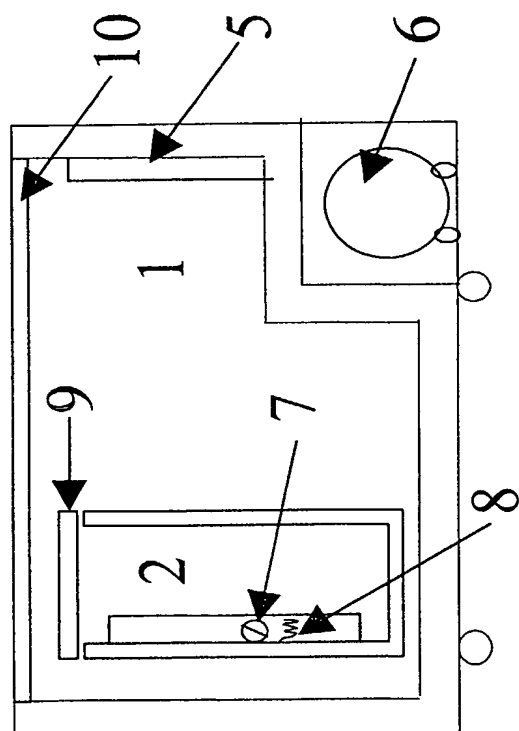


Figure 1

